


PART NUMBER: RD-nRF52-RFX2411N-REV2

HOLE CHART

SIZE	QTY	SYM	PLATED	TOL
0.25	576		YES	+0.075/-0.25

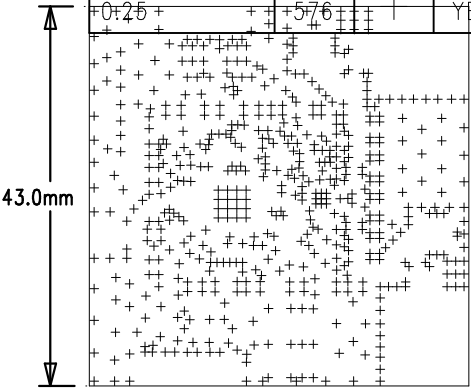

- NOTES:
1. BOARD TO BE 1.6mm (63mil) OVERALL FINISHED THICKNESS (METAL TO METAL).
  2. SEE STACK-UP FOR FINISHED COPPER WEIGHTS AND DIELECTRIC THICKNESSES.
  3. SILK SCREEN TO BE WHITE. CLIP SILK SCREEN TO SOLDERMASK.
  4. SOLDERMASK PER SUPPLIED ARTWORK. ENLARGE/OPEN AS NECESSARY. SOLDERMASK TO BE COLOR BLUE.
  5. 0.46mm (.018") WIDE LINES ON LAYER 1 SHALL BE 50 OHM +/- 10%.
  6. MATERIAL TO BE HI-TEMP GLASS FIBER EPOXY PER IPC-4101/126.  
Er = 3.9 +/- 5% @ 2.5GHz, Tg > 170 DEG C, TD = 350 DEG C, AND DISSIPATION FACTOR MAX .025.
  7. ALL EXPOSED CIRCUITRY SHALL HAVE ENIG FINISH. 4uINCHES MAX IMMERSION GOLD.



4 LAYER STACK-UP

